

# MM-80

The Industry Standard Heavy Duty, Semi-Rigid Epoxy  
Joint Filler for Class 6-9 Industrial Concrete Floors

## TECHNICAL DATA

## M-1

USGBC LEED® EQ Credit 4.1 - Low Emitting Sealant

### 1. Product Name

MM-80 Semi-Rigid Epoxy Joint Filler

### 2. Manufacturer

METZGER/McGUIRE

P.O. Box 2217 CONCORD, N.H. 03302 (U.S.A.)

TOLL-FREE: (800) 223-6680 • PHONE: (603) 224-6122

FAX: (603) 224-6020 • E-MAIL: [specmm80@aol.com](mailto:specmm80@aol.com)

Web Site: [www.metzgermcguire.com](http://www.metzgermcguire.com)

### 3. Product Description

#### Composition

MM-80 is a two-component, 100% solids content epoxy joint filler. When cured, MM-80 is a gray, semi-rigid (hard but slightly resilient) filler with a Shore hardness of A90-95.

#### Related Products

MM-80 is available in two versions; MM-80 with the original 5:1 ratio, used primarily for manual dispensing, and MM-80P, with a 1:1 mix ratio, intended for use in dual-component mechanized pumps.

#### Basic Use

MM-80 was developed to fill and protect joints in industrial concrete floors that are subject to hard wheeled material handling traffic and heavy loads. Its primary function is to support such traffic and protect joint edges. MM-80 is designed for use in areas where final temperatures are from 40°F (10°C) to +120°F (49°C). It is also ideal for joint and crack repair.

### 4. Limitations


MM-80 is not designed for use in:

- True expansion/isolation joints
- Exterior joints (paving, etc.)
- Joints exposed to extreme chemical exposure
- Joints under VCT/seamless floor coverings (in most settings)

As with most semi-rigid joint fillers, MM-80 may discolor if subjected to UV rays from certain types of lighting systems.

### 5. Correct Joint Design/Installation

MM-80 should be installed full joint depth in saw-cut control joints (or 2" min. in joints where depth exceeds 2") per PCA and ACI guidelines. In construction (formed) joints that are not saw-cut, MM-80 should be installed 2" deep. If shrinkage crack is excessive and needs to be "choked off," it may be sealed with clean, dry silica sand as shown below (contractor's option).

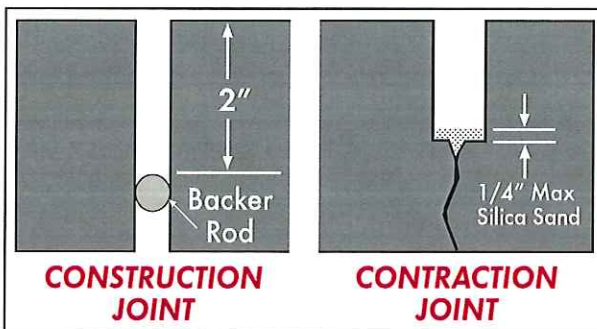

Do not use compressible backer rod in saw cut contraction/control joints less than 2" deep. Compressible rod may be used as a base in construction joints if placed 2" below floor surface.

### 6. Color and Packaging

Standard color is medium gray. MM-80 can be custom colored. Contact Metzger/McGuire for details.

MM-80 is available in 1 gal. (US) , 5 gal (US) and 30 gal. (US) kits.

### 7. Applicable Specifications

There are no government or ASTM standards for floor joint fillers. MM-80 meets and/or exceeds the floor joint filler guidelines set forth by the American Concrete Institute (302.1 R-04 Guide for Concrete Floor and Slab Construction, ACI Committee 302), ACI 360 and PCA (Concrete Floors on Ground, Third Edition 2001, James A. Farny, PCA).

### 8. Advantages

MM-80's superior formulation yields sufficient rigidity to support loads crossing joints, protecting edges from spalling, and sufficient resiliency to prevent brittleness throughout the floor's life.

MM-80 exhibits low range tensile and adhesive strengths, characteristics necessary to allow the joints to open as the concrete shrinkage progresses.

MM-80's relative hardness has been gradually increased through the years to reflect increasing demands on floors created by heavier loads and smaller, harder vehicle wheels.

MM-80 is the joint filler upon which ACI and PCA standards are based. You can specify and use MM-80 with the confidence that comes from a project-proven track record of more than thirty years and with the knowledge that you are relying on the best floor joint protection available in the industry.

### 9. USDA/FDA/CFIA/LEED® Acceptability

MM-80 is acceptable for use in floors subject to inspection/regulation by USDA/FDA and Environment Canada/CFIA. MM-80 contains no VOC's and fully complies with all LEED® green building standards.

### 10. Technical Assistance

Complete technical support and literature are available from authorized distributors, through our web site ([www.metzgermcguire.com](http://www.metzgermcguire.com)) or by contacting our NH headquarters at (800)223-MM80.

### 11. TECHNICAL PROPERTIES

	TEST METHOD	RESULTS
HARDNESS, SHORE "A" @ 70°F	D-2240	A90-95
TENSILE STRENGTH	D-638	1300 PSI
TENSILE ELONGATION* @ 70°F	D-638	45-55%
ADHESION TO CONCRETE	D-4541	300-350 PSI
POT LIFE @ 70°F	-	15-30 Mins.
INITIAL CURE @ 70°F	-	6-8 Hours
LIGHT TRAFFIC READY @ 70°F	-	6-8 Hours
FULL TRAFFIC READY @ 70°F	-	8-12 Hours
MIX RATIO BY VOLUME	-	5:1
MIX RATIO BY WEIGHT	-	100:15
SOLIDS CONTENT	-	100%
SHRINKAGE	-	Negligible

\* This property provided only for comparison with other fillers.

Elongation does not directly correlate to lateral expansion capability.

Revised 09/08

 METZGER/McGUIRE

Customer Service - (800) 223-MM80 - Technical Assistance

E-Mail: [specmm80@aol.com](mailto:specmm80@aol.com) • Web Site: [www.metzgermcguire.com](http://www.metzgermcguire.com)

## 12. Quality Installation Program

When you specify "MM-80, No Substitutes" your project is eligible for our Quality Assurance Program. This project-tracking program helps ensure that MM-80 is properly installed. There is no charge for this service.

## 13. Where to Specify and File

MM-80 is exclusively for use in concrete floors and thus should always be referenced in 03251 (expansion/contraction joints), 03300 (cast-in-place concrete) and/or 03930 (control joint sealers). It is not a sealant and should not be specified as part of 07900, other than for cross reference.

## 14. Availability

MM-80 is available through quality construction supply distributors (listing available at [www.metzgermcguire.com](http://www.metzgermcguire.com)) or through our NH headquarters.

## 15. Installation

The following instructions are abbreviated. Complete instructions are provided with each shipment.

**When to Install** - The installation of MM-80 should be deferred as long as possible after slab placement and should not be installed prior to 30 days to ensure adequate adhesion. ACI recommends a slab cure of 60-90 days or longer to permit for greater concrete shrinkage/joint opening, lessening the expected incidence of joint filler separation. Ambient areas should be stabilized at final operating temperature prior to installation, refrigerated areas stabilized and held for an additional 7-14 days or longer if possible. Refer to *Technical Bulletin T5 (Installation Timing)* for additional information.

**Joint Preparation** - Joints should be completely free of saw laitance, dirt, debris, coatings/sealers and frost or visible moisture. Joint cleaning procedures must accomplish the removal of all of the above. Failure to do so will compromise adhesion. Simply "raking" debris out of joint is not an acceptable cleaning method. Preferred method of joint cleaning is to use a dustless concrete saw with diamond blade (ensure blade is slightly wider than joint or clean both sides). No primer is needed. If unusual conditions are present, contact Metzger/McGuire.

If possible concrete staining from joint filler overfill is an issue, apply Metzger/McGuire's SPF (stain preventing film) prior to material installation, being careful to prevent SPF from entering joints as it may compromise adhesion. If SPF enters joints, clean joints as outlined previously.

The applicator may, at his option, choke-off the shrinkage crack at the base of the joint with a 1/4" maximum layer of clean, dry silica sand. **Do not use compressible backer rod (Ethafoam, etc) in saw cut joints less than 2" deep.** The applicator may use a compressible backer rod in through-slab construction (cold) joints or contraction/control joints exceeding 2" in depth ONLY. If used, the rod must be placed at least 2" below floor surface.

### Prior to Dispensing

Caution: Thoroughly read MSDS and complete installation instructions prior to opening containers or attempting to dispense.

**Mixing** - Use a variable speed drill at low RPM and a paint mixing paddle (Jiffy or similar) to mix MM-80. Mix Part A thoroughly before combining. Gradually blend Part B into Part A and mix for approximately 1 1/2 minutes or until thoroughly blended. Do not dilute or alter material. Mix entire kit.

**Dispensing** - MM-80's viscosity is similar to a medium weight motor oil. It can be poured from can, but best results are obtained by dispensing through a bulk-type caulking gun or a dual-component dispensing pump ratioed at 5:1.

MM-80 should be installed using a two pass method. The first pass should fill the joint to within 1/2" of floor surface. Within 60-90 minutes (at 70 °F)

### Installation - Dispensing (Continued)

overfill joint with a second pass, leaving material "crowned" above floor. Check joints periodically to ensure low spots do not occur due to seepage. Do not fill flush and leave as low filler profile is likely to occur. Allow material to cure into solid (approx. 6-8 hours minimum) and shave or grind material flush with floor surface. If shaving, heat material lightly with propane torch or other heating source prior to shaving to ease the shaving process and ensure a smoother filler profile. Use respirator mask if heating overfill.

Any overfill not removed during razoring may leave a slight stain on concrete. The degree of staining will depend on the surface density (porosity) of the slab. The stain will gradually fade as a result of subsequent traffic and floor cleaning procedures. Stains can be reduced or avoided by using Metzger/McGuire's SPF (stain preventing film). See product data for more information.

### Clean-Up

Spills of unmixed components can be cleaned up with solvent (Toluol, MEK, Denatured Alcohol, etc). Cured product can be shaved off floor and tools.

## 16. Maintenance

Once cured, MM-80 is basically maintenance free. If joints should open after installation due to concrete shrinkage, fill any voids exceeding credit card width with additional MM-80 or M/M's *Spal-Pro RS 88*. Refer to *Technical Bulletin T11 (Joint Filler Separation; Causes & Correction)* for additional information.

## 17. Approximate Coverage Rates

Joint Size (US)	LF/Gal.	Joint Size (Metric)	M/Gal
1/8" x 1"	150	3 x 25	46
1/8" x 1 1/4"	125	3 x 31	38
1/8" x 1 1/2"	100	3 x 38	30
1/8" x 1 3/4"	85	3 x 44	26
1/8" x 2"	75	3 x 50	23
3/16" x 3/4"	135	5 x 19	41
3/16" x 1"	100	5 x 25	30
3/16" x 1 1/4"	85	5 x 31	26
3/16" x 1 1/2"	70	5 x 38	21
3/16" x 1 3/4"	60	5 x 44	18
3/16" x 2"	50	5 x 50	15
1/4" x 1"	80	6 x 25	24
1/4" x 1 1/4"	60	6 x 31	18
1/4" x 1 1/2"	50	6 x 44	14
1/4" x 1 3/4"	45	6 x 50	12
1/4" x 2"	40	9 x 25	15
1/2" x 1"	40	13 x 25	12

## 18. Shelflife and Storage

MM-80 has a guaranteed shelf life of 12 months if containers remain unopened. Store in dry, cool areas away from excessive heat, freeze/thaw and sunlight. See complete installation instructions for information.

## 19. Safety

This product is for industrial use only. Use only in well ventilated areas. Practice all normal jobsite safety precautions (clear work area, etc). Thoroughly read and understand MSDS and installation instructions for additional information prior to using material.

## 20. Food Related Facilities

USDA limits the use of chemicals in areas where existing food/food packaging is present. See "Food Warning" in installation instructions. MM-80, when cured, is acceptable in USDA/FDA regulated facilities.

**WARRANTY:** Metzger/McGuire Co. solely and expressly warrants that its product shall be free from defects in material and workmanship for 12 months from the date of purchase. Unless authorized in writing by an officer of Metzger/McGuire, no other representations or statements made by Metzger/McGuire or its representatives, in writing or orally, shall alter this warranty. Metzger/McGuire makes no warranties, implied or otherwise, as to the merchantability or fitness for ordinary or particular purposes of its products and excludes the same. If any Metzger/McGuire product fails to conform with this warrant, Metzger/McGuire will replace the product at no cost to the purchaser. Purchaser's sole remedy in any case shall be limited to the purchase price or replacement cost of product and specifically excludes labor and the cost of labor, lost wages and opportunity costs, and all other possible incidental, consequential or special damages resulting from any claim of breach of warranty, breach of contract, negligence or any legal theory. Any warranty claim must be made within one (1) year from the date of material purchase. Metzger/McGuire does not authorize anyone on its behalf to make any written or oral statements which in any way alter the installation procedures or written installation instructions published in its product literature or on its packaging labels. Any installation of Metzger/McGuire products which fails to conform with such installation information or instructions shall void this warranty. Purchaser shall be solely responsible for determining the suitability of Metzger/McGuire's products for the purchaser's intended purpose. Revised 05/08